

# 60W Flood / Area Light



NEW FL04 Series

Sleek, streamlined design with premium performance

LM80  
Tested Chips

Polyester  
Powder Coat Finish  
Bronze Standard

Highest Grade  
Polycarbonate Optics

Type III Standard  
Type V Available

Trunnion Mount Standard

Field-Interchangeable:  
Slip Fitter, Pole, or Multi-Mount  
Ordered Separately

Options available (ordered separately):

Pole Mount



FL04-PM

Multi Mount



FL04-MM

Slip Fit Mount



FL04-SF

Visor



FL04-SHIELD-SM

Motion Sensor or Photocell



FL04-MMS-KIT

FLPC-LV

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	8,318 lm
Efficacy	133.22 lm/W
CCT	5000K
CRI	70
Dimmable	0-10V
L70 Life	54,000
Warranty	10-year

### APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLG6RJ14GTVN

### ILLUMINANCE AT A DISTANCE

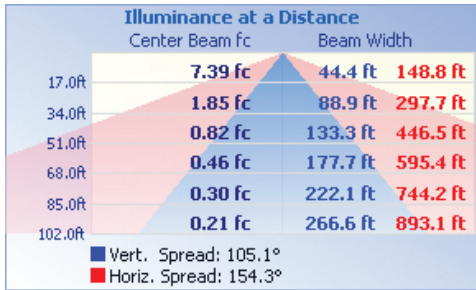

### ELECTRICAL

Wattage	60W
Voltage	120-277V
Power factor	0.90
THD	15%
Operating temp	-40 to 40°C


### CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	Bronze
IP rating	IP65
EPA rating	45° - 1.13 ft <sup>2</sup> Horizontal - 0.8 ft <sup>2</sup> Vertical - 1.6 ft <sup>2</sup>
Weight	12.78 lbs
Carton qty	1

### DIMENSIONS

58.5 \* 38.5 \* 16 cm

### ISOCANDELA PLOT

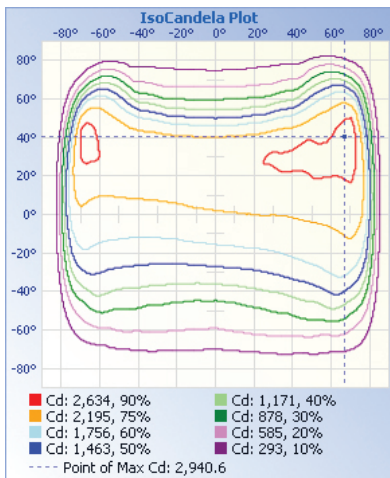

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | [ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)