

HBE 150W High Bay



Smart and stylish design for better cooling and high lumen efficacy
Optional motion sensor and/or yoke available

Comes with 2m
power cord

0-10V
Dimming



Impact resistant, high grade
polycarbonate lens will not yellow

Suitable for use in hockey rinks
and food processing facilities



Shown with
OPTIONAL YOKE
#HBE-yoke



Shown with
OPTIONAL MOTION
SENSOR KIT
#HBE-F-MS-IO

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	19,283
Efficacy	130.03 lm/W
CCT	4000K
Beam angle	90°
CRI	83.3
Dimmable	0-10V
Rated hours	50,000
Warranty	5-year


APPROVALS AND LISTINGS

cUL	E482965
DLC	PWG21HM4

DIMENSIONS

Φ14"×5.5"

ISO CANDELA PLOT

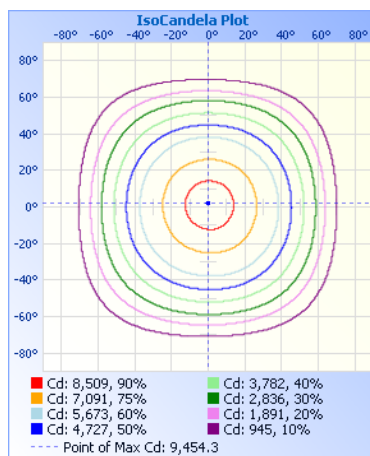

ELECTRICAL

Wattage	150W
Voltage	120-277V
Power factor	0.9
THD	19.16%
Operating temp	-40 to 40°C

CONSTRUCTION

Housing	Aluminum
Finish	Powder-coat
Colour	Black
IP rating	IP65
Weight	14.5
Carton qty	1

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	32.6 fc	34.0 ft	34.0 ft
34.0ft	8.2 fc	67.9 ft	68.0 ft
51.0ft	3.6 fc	101.9 ft	102.0 ft
68.0ft	2.0 fc	135.9 ft	136.1 ft
85.0ft	1.3 fc	169.8 ft	170.1 ft
102.0ft	0.9 fc	203.8 ft	204.1 ft

■ Vert. Spread: 89.9°
■ Horiz. Spread: 90.0°