

40W Direct Lit Vapour Proof

Ideal for parking structures, welding cells, paint lines, and parts inspections
Suitable for damp/wet locations or wherever a high impact-resistant fixture is required

Corrosion-, flame-, and vandal-resistant



Top grade UV stabilized
Bayer Makrolon polycarbonate
construction

Ultra-low V2
flammability rating

4 rows of Samsung SMD LEDs
ensures incredibly low glare
and high thermal management

0-10V dimmable
Optional motion sensor available

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	5,508
Efficacy	134 lm/W
CCT	5000K
Beam angle	N/A
CRI	83.2
Dimmable	Yes
Rated hours	50,000
Warranty	5-year

APPROVALS AND LISTINGS

cUL	E360375
DLC	PL9X565TP5H3

DIMENSIONS

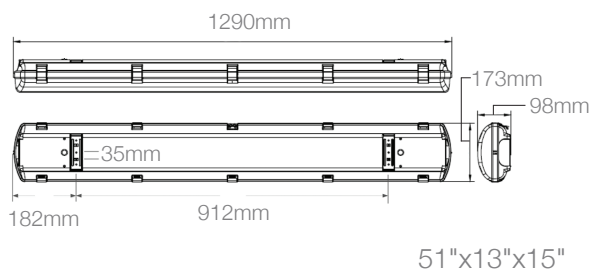

ELECTRICAL

Wattage	40W
Voltage	120-277V
Power factor	0.92
THD	21.82%
Operating temp	-40 to 40°C

CONSTRUCTION

Housing	Polycarbonate
Colour	Grey
IP rating	IP65
Length	4 feet
Weight	7.5 lbs
Carton qty	6

