

40W Linear Strip, ST4 Series

Ideal for warehouses, industrial locations, and garages
Suitable for damp locations and row-mounting



High impact
polycarbonate lens

Can be surface mounted
or chain suspended

2 lumen outputs -
0-10V dimmable driver

High lumen efficiency
and low glare

Power entry on either
end of rear of fixture

Aesthetically pleasing, low profile design
Optional motion sensor available: YM2502



TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	4,919 lm
Efficacy	127.06 lm/W
CCT	4000K
CRI	85.1
LED Chip	93,000 hours
Warranty	5-year

APPROVALS AND LISTINGS

cUL	E491106
DLC PREMIUM	PL2296OACME4

ILLUMINANCE AT A DISTANCE

Illuminance at a Distance			
	Center Beam fc	Beam Width	
17.0M	0.48 fc	42.0 M	77.3 M
34.0M	0.12 fc	84.0 M	154.6 M
51.0M	0.05 fc	126.0 M	231.9 M
68.0M	0.03 fc	168.0 M	309.2 M
85.0M	0.02 fc	210.0 M	386.5 M
102.0M	0.01 fc	252.0 M	463.8 M

■ Vert. Spread: 102.0°
 ■ Horiz. Spread: 132.5°

ELECTRICAL


Wattage	40W
Voltage	120-277V
Power factor	0.90
THD	11.42%
Operating temp	-20 to 40°C

CONSTRUCTION


Housing	Rolled Steel
Finish	Enamel
Colour	White
IP rating	IP20
Weight	5.5 lbs
Carton qty	6

DIMENSIONS

48" X 3.14" X 3.43"

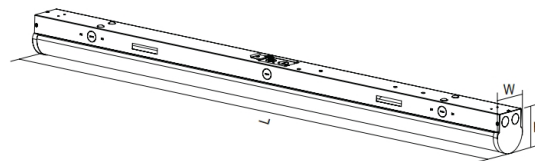

ISOCANDELA PLOT

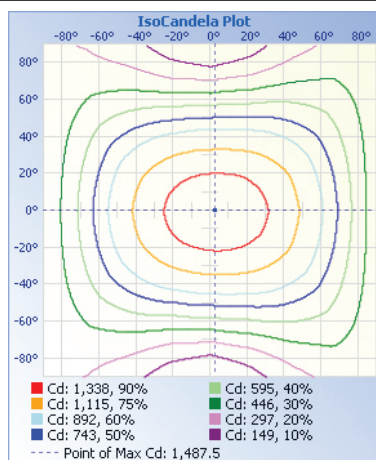Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com