

SP01B Sports Stadium Light

750W | 5000K | 120-347V

Suitable for indoor/outdoor recreational facilities
such as gymnasiums, stadiums, shipyards, airports, and high-mast lighting



0-10V
Dimmable

Complete with
Yoke Mount
Slip Fitter available
(sold separately)

Complete with
20° Optic Lens
60° optics lens available
(sold separately)

Complete with 1m
Power Cord

Instant Start
with no flickering
or humming

10kV Surge
Protection



Optional Accessories (Sold Separately):
Visor (SP01-VISOR-B), Laser Pen (SP01-LP),
60° Optics (SP01B-750W-60D), Slip Fitter (SP01-SF-LG)



SP01-VISOR-B



SP01-LP



SP01B-750W-60D



SP01-SF-LG

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	99,861 lm
Efficacy	134.07 lm/W
CCT	5000K
CRI	73
Beam Angle	20°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5 year

APPROVALS AND LISTINGS


cUL	E482965
DLC	PLLBSVAFCUJU

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	1,075.2 fc	6.7 ft	6.7 ft
34.0ft	268.8 fc	13.4 ft	13.5 ft
51.0ft	119.5 fc	20.1 ft	20.2 ft
68.0ft	67.2 fc	26.9 ft	26.9 ft
85.0ft	43.0 fc	33.6 ft	33.6 ft
102.0ft	29.9 fc	40.3 ft	40.4 ft

■ Vert. Spread: 22.3°
■ Horiz. Spread: 22.4°

ISOCANDELA PLOT

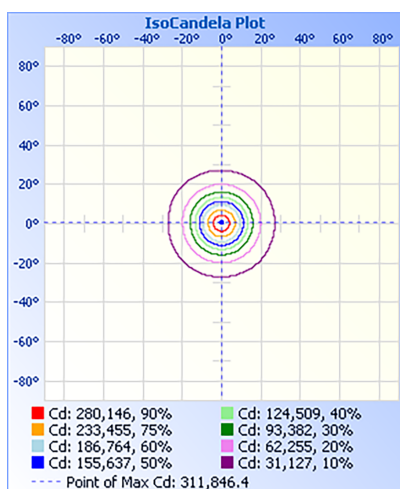

ELECTRICAL

Wattage	750W
Voltage	120-347V
Power Factor	>0.9
THD	<15%
Operating Temp	-40 to 45°C


CONSTRUCTION

Housing	Aluminum
Lens	Polycarbonate
Finish	Black
EPA	1.49 ft ²
IP Rating	IP65
Product Dimensions	464 x 523 x 521 mm
Product Weight	27.8 kgs
Carton Qty	1
Carton Dimensions	630 x 570 x 565 mm

ACCESSORIES (SOLD SEPARATELY)

Visor	SP01-VISOR-B
Laser Pen	SP01-LP
60° Optics	SP01B-750W-60D
Slip Fitter	SP01-SF-LG

DIMENSIONS

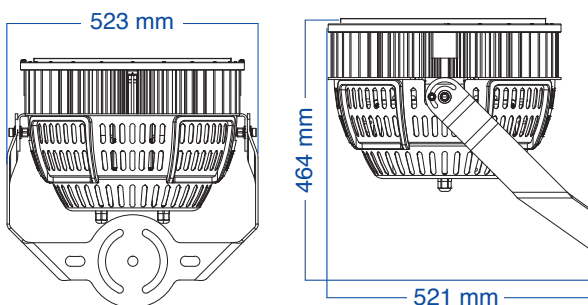

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com