

# 80W Architectural Wall Pack

DLC listed LED wall pack features high-end style with super bright, energy efficient LEDs  
Ideal for building entrances, multi-use facilities, apartment buildings, institutions, schools,  
stairways and loading docks



## TECHNICAL DATA



### LIGHT SPECIFICATIONS

Lumens	9,056
Efficacy	112.32 lm/W
CCT	4000K
Beam angle	90 x 120
CRI	84.2
Dimmable	No
Rated hours	50,000
Warranty	10-year

### APPROVALS AND LISTINGS


cUL	E482965
DLC	PWF5B6C9

### ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	14.20 fc	30.0 ft	37.1 ft
34.0ft	3.55 fc	60.1 ft	74.2 ft
51.0ft	1.58 fc	90.1 ft	111.3 ft
68.0ft	0.89 fc	120.2 ft	148.4 ft
85.0ft	0.57 fc	150.2 ft	185.5 ft
102.0ft	0.39 fc	180.3 ft	222.5 ft

■ Vert. Spread: 82.9°  
■ Horiz. Spread: 95.0°

### ILLUMINANCE AT A DISTANCE

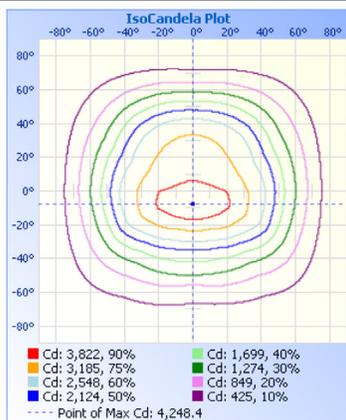


### ELECTRICAL

Wattage	80W
Voltage	120-277V
Power factor	0.95
THD	13.23%
Operating temp	-40 to 40°C

### CONSTRUCTION

Housing	Aluminum, tempered glass
Finish	Multi-coat, powder
Colour	White
Weight	10.5 lbs.
IP rating	IP65
Carton qty	2

### DIMENSIONS

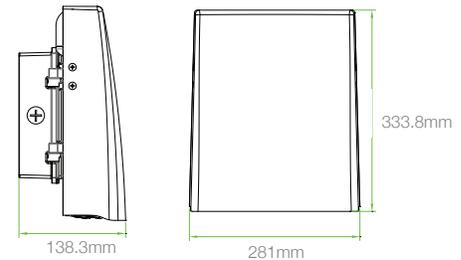

Also available in 347V

Order # AWP02-80W-40K-WH-347V