

# 450W Flood / Area Light



NEW FL04 Series

Sleek, streamlined design with premium performance

LM80  
Tested Chips

Polyester  
Powder Coat Finish  
Bronze Standard



Highest Grade  
Polycarbonate Optics

Type III Standard  
Type V Available

Trunnion Mount Standard

Field-Interchangeable:  
Slip Fitter, Pole, or Multi-Mount  
Ordered Separately

Options available (ordered separately):

Pole Mount



FL04-PM

Multi Mount



FL04-MM

Slip Fit Mount



FL04-SF

Motion Sensor or Photocell



FL04-MMS-KIT

FLPC-LV

## TECHNICAL DATA



### LIGHT SPECIFICATIONS

Lumens	54,464 lm
Efficacy	125.38 lm/W
CCT	4000K
CRI	73.8
L70 Life	54,000
Warranty	10-year

### ELECTRICAL

Wattage	450W
Voltage	120-277V
Power factor	0.92
THD	11.52%
Operating temp	-40 to 40°C


### APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLD9AKJ7EGNI


### CONSTRUCTION

Housing	Aluminum alloy
Finish	Polyester powder coat
Colour	Bronze
IP rating	IP65
EPA rating	45° - 2.34 ft <sup>2</sup> Horizontal - 1.4 ft <sup>2</sup> Vertical - 3.2 ft <sup>2</sup>
Weight	27.3 lbs
Carton qty	1

### ILLUMINANCE AT A DISTANCE

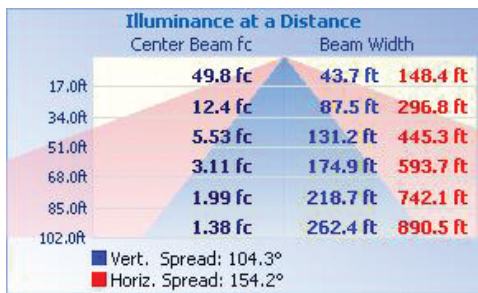

### DIMENSIONS

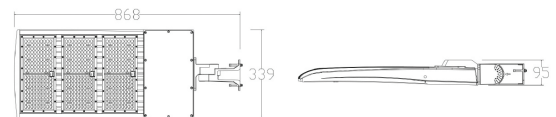

### ISOCANDELA PLOT

