


# Architectural Linear Strip

40W | CCT Selectable | 120-347V | 4ft

Elevate your space by creating your own custom lighting design  
Ideal for use in offices, conference rooms, hallways, educational facilities, and more

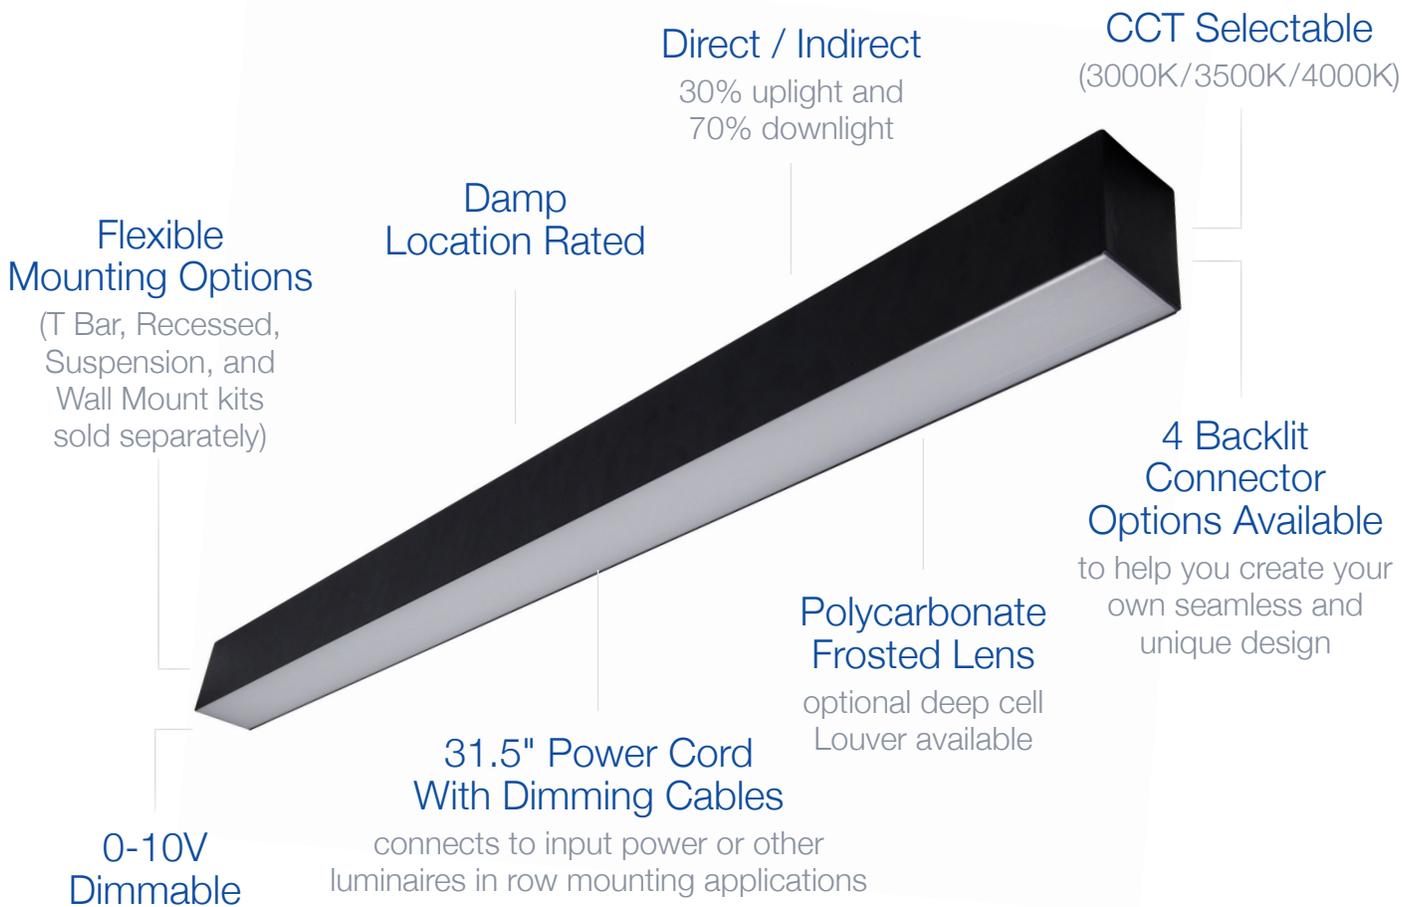

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	4,608 lm
Efficacy	111 lm/W
CCT	Selectable (30K/35K/40K)
CRI	83
Dimmable	0-10V
L70 Life	>50,000 hrs
Warranty	5-year

### APPROVALS AND LISTINGS

cUL	E482965
-----	---------

### DIMENSIONAL DRAWING

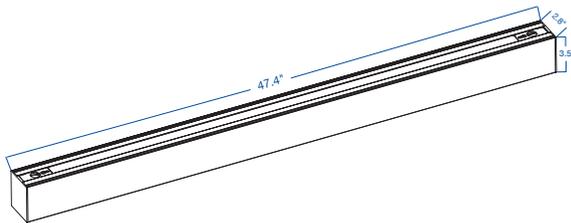

### CONNECTORS (Sold Separately)

AL-120-CON-BK	120° Connector (Black)
AL-L-CON-BK	90° Connector (Black)
AL-T-CON-BK	T Connector (Black)
AL-X-CON-BK	X Connector (Black)



**NOTE:** All Connectors require Connection Kits (AL-C-KIT-BK). Please refer to the connector product sheets to learn more.

### ELECTRICAL

Wattage	40W
Voltage	120-347V
Current	0.43A
Surge Protection	4kV
Auxiliary Output	N/A
Power Factor	>0.9
THD	6.4%
Operating Temp	-30°C to 40°C

### CONSTRUCTION

Power Cord	55"
Housing	Aluminum
Finish Colour	Black
Lens	Polycarbonate
IP Rating	IP20 (Damp Location)

### DIMENSIONS AND WEIGHTS

Product Dimensions	47.4" x 2.8" x 3.5"
Fixture Weight	6.6 lbs
Carton Qty	1
Carton Gross Weight	7.49 lbs
Carton Dimensions	48.2" x 3.7" x 3"
Master Carton Qty	6
Master Carton Gross Weight	41.9 lbs
Master Carton Dimensions	48.2" x 11.8" x 6.9"

### KITS AND MOUNTING (Sold Separately)

AL-C-KIT-BK	Connection Kit (Black)
AL-L-KIT	Louver Kit
AL-MR-KIT	Mud-In Recessed Kit
AL-S-KIT-BK	Suspension Kit (Black)
AL-WM-KIT-BK	Wall Mount Kit (Black)
AL-TB-KIT	T Bar Mounting Kit