

# FL04B Flood / Area Light

150W | 5000K | 120-347V



**TRUE UNIVERSAL POWER INPUT FROM 120-347V!**

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

**Removable Access Plate**  
for easy field installation of  
twist lock photocell receptacle



**Type III Polycarbonate Optics**  
Type IV and V available

**Rugged Die Cast Aluminum Housing**  
(White)

**Pre-wired for Optional Motion Sensor**  
(Sensor & remote sold separately)



HB01R



MS04-MW-TW-DC



**Pressure Relief Respirator**  
for expansion/contraction

**Complete with Trunnion**  
Interchangeable mounting  
options sold separately

**Quick-Release, Hinged Access Cover**  
for control compartment

**Accessories (Ordered Separately):**  
Slip Fit, Pole Mount, Multi Mount, Motion Sensor Remote, Motion Sensor, Type IV and V Optics, Photocell and Receptacle



FL04-SF-WH



FL04-PM-WH



FL04-MM-WH



HB01R



MS04-MW-TW-DC

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	20,510 lm
Efficacy	136 lm/W
CCT	5000K
CRI	73
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	10-year


### APPROVALS AND LISTINGS

cUL	E482965
DLC	PLG19W9R59FR


### ISOCANDELA



### ILLUMINANCE AT A DISTANCE

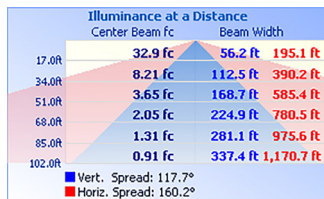

### DIMENSIONS (SHOWN WITH TRUNNION MOUNT)

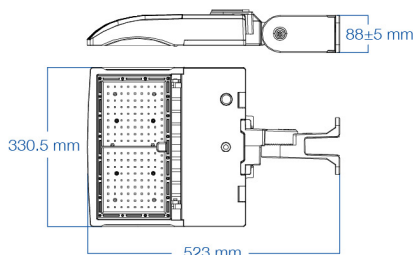

### ELECTRICAL

Wattage	150W
Voltage	120-347V
Power Factor	0.9
THD	15%
Operating Temp	-30 to 50°C

### CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Bronze
IP Rating	IP65
EPA	1.32 ft <sup>2</sup>
Net Weight	6.36 kg
Gross Weight	7.11 kg
Carton Qty	1
Carton Dimensions	690 x 380 x 155 mm

### ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL04-SF-WH
Pole Mount	FL04-PM-WH
Multi Mount	FL04-MM-WH
Motion Sensor	MS04-MW-TW-DC
Motion Sensor Remote	HB01R
Photocell and Receptacle for 120-277V sites	JL-200 and JL-205LV
Photocell and Receptacle for 277-480V sites	JL-200 and JL-207E
Type IV Optics	FL04B-TYPE-IV
Type V Optics	FL04B-TYPE-V

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com